

## SEISMIC CONDITIONS IN BAGHDAD REGION AND EVALUATION OF SEISMIC DESIGN FORCES

**Dr. Mohammed Y. Fattah**

Lecturer, Building & construction Dept.  
Technology University

**Asma Y. al- Tae'e**

Assistant Lecturer, Civil Eng. Dept.  
College of Eng./ University of Baghdad

### ABSTRACT

In this paper, a study of the earthquakes that have affected Baghdad region in Iraq is made. The documents collected from different references are analyzed to determine the seismic zone of Baghdad. Evaluation of seismic design forces for equivalent static analysis of earthquakes in Baghdad region is made according to the Iraqi seismic code and the International Building Code (IBC, 2000).

The studies reached that intensity greater than V on Mercalli Scale has never been recorded on the site at Baghdad. While Seismicity Map of Iraq, proposed by Iraqi Seismic Code, reveals that, Baghdad places in a zone of intensity between (VI-VII) on the Modified Mercalli Scale. Also, the studies reached that magnitude greater than 5.7 on Richter Scale has never been recorded on Baghdad.

When calculating the total horizontal seismic design force acting on buildings and structures according to the formula of the Iraqi Seismic Code Requirements for Buildings (1997), the coefficient Z (seismic hazard zoning coefficient) shall be taken as (0.05) for Baghdad region.

### الخلاصة

في هذا البحث اجريت دراسة عن الهزات الارضية التي اثرت على منطقة اربيل في العراق. ان المعلومات التي جمعت من عدة مصادر تم تحليلها لتحديد المنطقة الزلزالية لأربيل. وتم تحليل وتقويم القوى الزلزالية التصميمية المكافئة للقوى الساكنة في منطقة اربيل بناء على متطلبات المدونة الزلزالية العراقية ومدونة البناء العالمية (IBC, 2000).

لقد اظهرت الدراسات ان شدة زلزالية اكبر من (5) حسب مقياس ميركالي لم تسجل في موقع اربيل خلال الفترات السابقة، بينما نصت المدونة الزلزالية العراقية وبناء على الخارطة الزلزالية للعراق ان تقع ضمن شدة زلزالية اكبر من (7) حسب مقياس ميركالي المعدل. وعند حساب القوى الزلزالية الجانبية التصميمية المؤثرة على الابنية والمنشآت بناء على المدونة الزلزالية العراقية يتبين ان المعامل Z (معامل المنطقة الزلزالية) يجب ان يؤخذ (0.05) لمنطقة بغداد

### KEY WORDS

Baghdad, earthquake, magnitude, intensity, seismic force.

## INTRODUCTION

When the ground is shaken by an earthquake, affected buildings must respond to the adjacent ground motion. Damage produced by earthquakes has provided some insight into how buildings respond. This information has been greatly augmented in recent years by theoretical and experimental studies of the response of structures to random vibratory loadings similar to those produced by earthquakes.

The vibratory ground motion to which a structure or building responds can be considered from two different aspects: the general geographic region in which the building is located; and the close-environmental, where the building can be influenced by local conditions (Perry and Rutledge, 1974).

## RISK EVALUATION

Seismic risk should be expressed in terms of return periods, such as done for winds and floods. The basic seismological information obtained from the seismic geology and the available seismic record should be converted into terms suitable for use by the engineer. Magnitude information, or even Modified Mercalli intensity values, can be expressed as return periods or probability curves rather than as ill-defined terms such as "probable maximum" or "lifetime earthquake". For a well-balanced economic design, it is necessary to know how quickly the risk of occurrence decreases as the intensity of ground motion increases. It has been found empirically by several investigators (Nordquist, 1945; Milne and Davenport, 1965; Disk, 1965) that the distribution of maximum magnitude or intensity in a region can be represented by an extreme value distribution of the Gumbel (1958) type.

The sources available from which a seismic hazard assessment for central Baghdad can be made are as follows:

- 1- The study of tectonic structure and regional geology.
- 2- Historical records of seismic events.
- 3- Recent (post 1900) quantitative records of earthquakes in the surrounding region (Khulafa Street Project, 1981).

## DISTRIBUTION OF EARTHQUAKES IN IRAQ

The North, North-East, and East of Tigris regions suffered from the strongest earthquakes. The scale of these quakes became lower and weaker as they move towards the South and South-West regions of Iraq. When the earthquakes distribution map is drawn according to the lines of expected highest intensities of the earthquakes, it was found that the scale ranges between (5) and (9) according to the Modified Mercalli Scale (Al Omari, et al., 1982). **Fig. (1)** shows a map of the regions for the earthquake focuses within the geographical boundaries of Iraq (longitude 38- 50 °N) and (latitude 28- 38 °N), which are derived from the earthquakes and tectonics information available at the Earthquakes Monitoring Center- Iraqi Scientific Research Council for the period between (1900- 1999) (Earthquakes Monitoring Center- Iraqi Scientific Research Council). **Fig. (2)** shows the regions of high intensity earthquakes (according to Modified Mercalli Scale) in Iraq (Fahmi, 1984).

## HISTORICAL RECORDS OF SEISMIC EVENTS

Iraq possesses a well-documented history of seismic activity and Al-Sinawi and Ghalib (1975) have prepared a comprehensive catalogue of historical earthquakes covering the period 1260 B.C. to 1873 A.D. Ambraseys (1978) provides a valuable reassessment of the seismicity of the Middle East from which it is possible to obtain a reasonable prediction of the earthquake related ground motions in this area.

## STUDIES OF EARTHQUAKES

### Magnitude.

#### United Kingdom Institute of Geological Sciences Global Seismology Unit (I.G.S)

This analysis was based on the computer listing and map provided by the United Kingdom Institute of Geological Sciences Global Seismology Unit. This listing contains all the earthquakes found in the file within a  $10^\circ$  region of latitude and longitude approximately centered on Baghdad. These events were recorded between (1905-1978) (I.G.S, 1981). These data can be seen in **Fig. (3)** and these events have been plotted on map, which is reproduced in **Fig. (4)** (Khulafa Street Project, 1981).

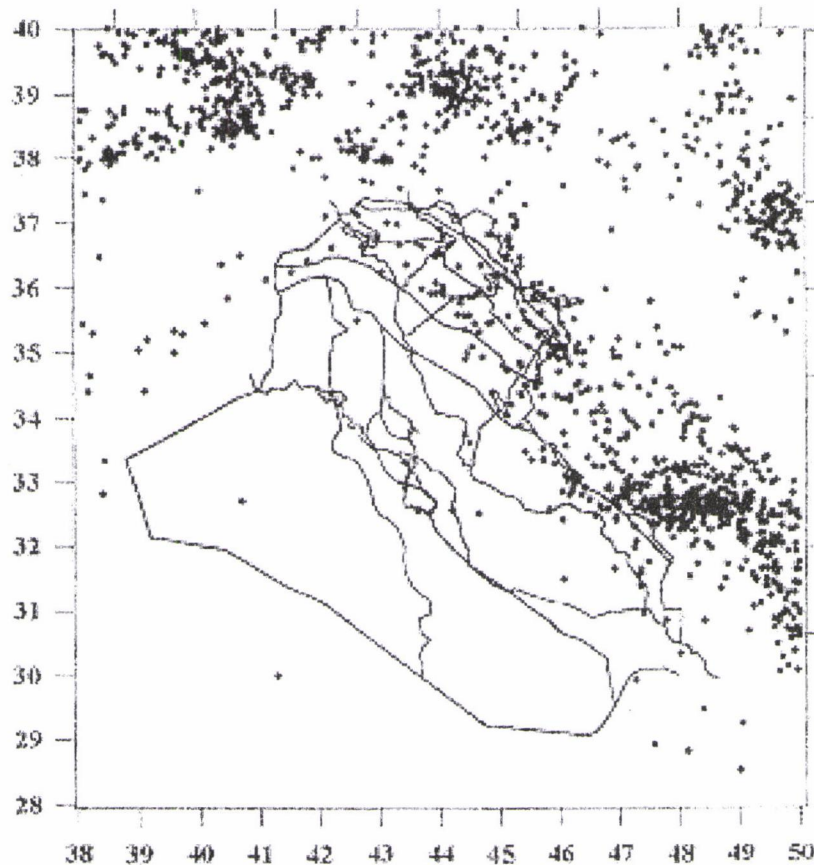


Fig. (1) Map of the regions for the earthquake focuses within the geographical boundaries of Iraq (1900- 1999) (from Earthquakes Monitoring Center- Iraqi Scientific Research Council).

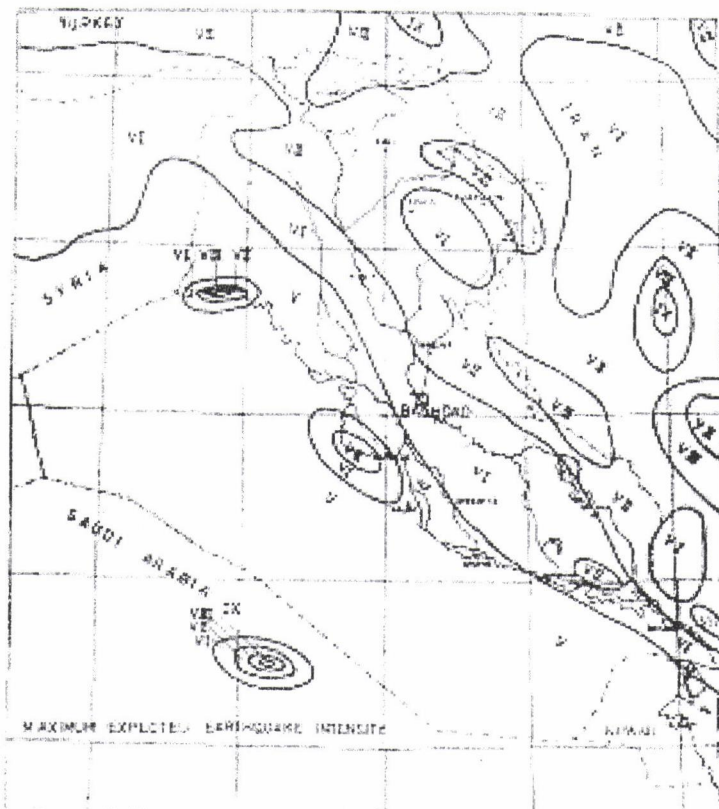


Fig.(2) The regions of high intensity earthquakes in Iraq (from Fahmi, 1984).

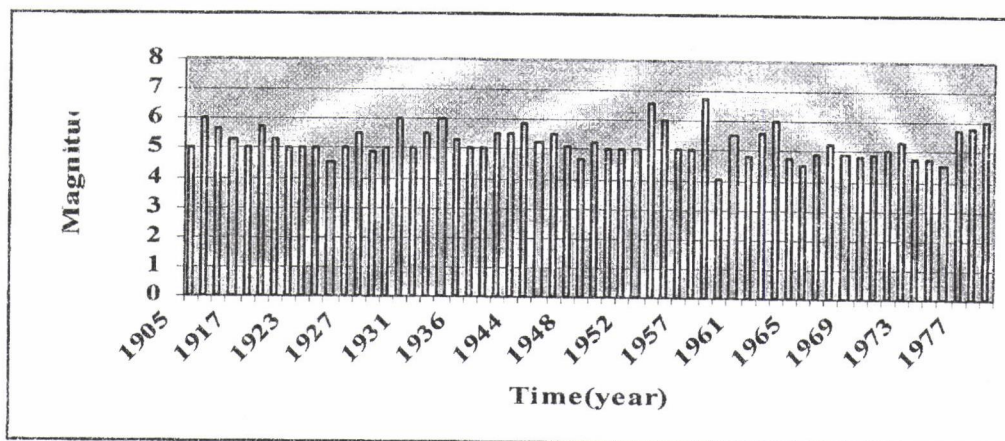


Fig. (3) Earthquakes records found within 10° region of latitude and longitude approximately centered on Baghdad (1905-1978).

From Fig. (3), it can be seen that the magnitude reached a maximum value of about 6.6 on Richter Scale. From Fig. (4), It can be seen that the majority of the events recorded have their origins in a band running NW- SE some 150 to 350 km from Baghdad at its nearest, which corresponds to the suture zone between the Arabian and Iranian tectonic plates see Fig. (5).

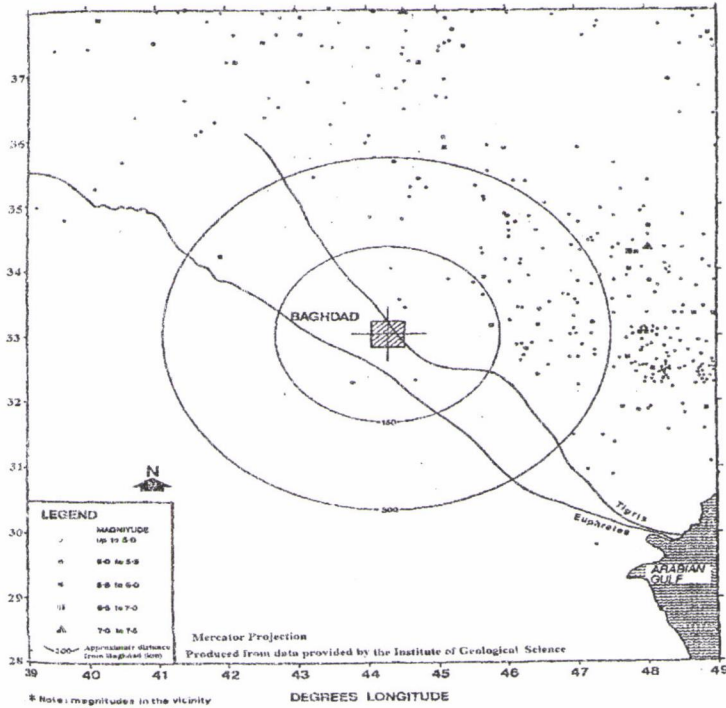


Fig. (4) Recorded seismic events (1905-1978).

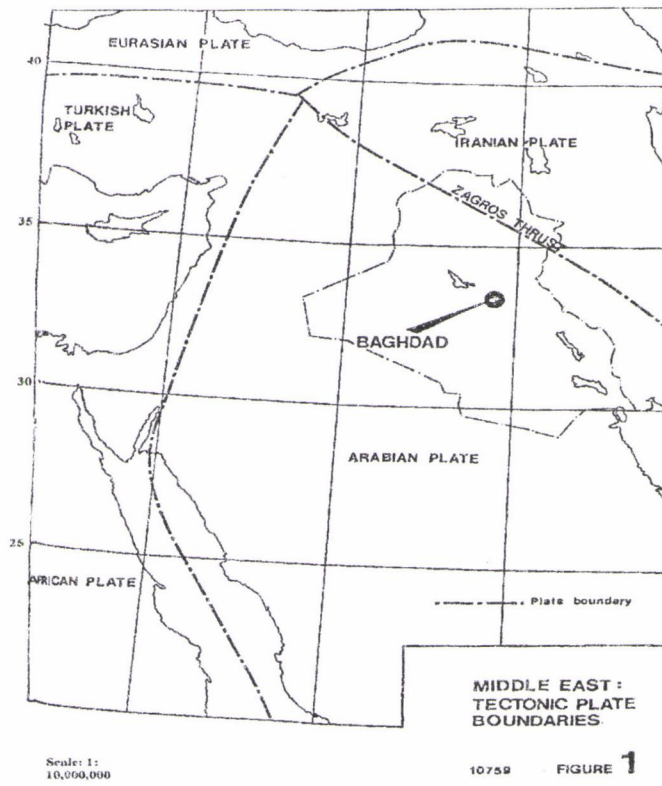


Fig. (5) Middle East Tectonic plate boundaries.

To ensure the validity of the records, which are of particular significance to the analysis, details of events within a radius of approximately 150 km of Baghdad were individually verified or, if necessary, amended by Professor N. N. Ambraseys of Imperial College. **Table (1)** and **Fig. (6)** present the results of this comparison.

From **Table (1)** and **Fig. (6)**, it can be shown that the earthquakes may occur at random locations within the plate with magnitude up to 5.7 on Richter Scale.

### INTENSITIES

Many studies are made to draw intensity contours. These contours show intensities that Iraq is subjected to four different periods (return periods of 50, 100 and 200 years and projected life time of 50, 100 and 200 years). This can be shown in Figs. 7, 8, 9, 10, 11 and 12 (Puttonen and Varpasuo, 1982). Seismicity map of Iraq recoded by Iraqi Seismic Code Requirements for Buildings (1997) shows that Baghdad is subjected to intensity between VI-VII on Modified Mercalli Scale see **Fig. (12)**

Table (1) Verification of I.G.S. epicenters in the vicinity of Baghdad,  
(from Khulafa Street Project, 1981).

Year	Latitude	Longitude	Magnitude
1917	30.37N	46.86E	5.0
1917	33.48N	45.82	5.6
1918	34.50N	41.80E	5.7
1918	34.50N	41.80E	5.7
1919	34.50N	41.80E	5.3
1919	34.50N	41.80E	5.2
1920	33.50N	46.50E	5.0
1920	33.15N	46.14E	5.4
1930	32.50N	43.70E	5.3
1930	32.50N	43.70E	5.3
1932	33.00N	47.00E	5.5
1932	32.52N	47.38E	5.0
1940	33.50N	46.50E	5.5
1940	33.44N	46.71E	5.4
1950	34.00N	45.50E	5.0
1950	33.58N	45.50E	4.8
1956	33.10N	46.60E	5.0
1956	33.31N	46.72E	5.2
1962	33.40N	46.00E	4.0
1962	33.44N	46.11E	4.1
1967	33.75N	44.43E	3.9
1967	33.60N	44.40E	3.8
1972	32.87N	46.83E	5.3
1972	32.88N	46.85	4.4
1975	32.50N	44.65E	3.0
1975	32.50N	44.70E	3.7
1976	33.62N	44.50E	3.0
1976	33.62N	44.50E	3.5

Note: For each event the upper line is the I. G. S. record, the lower is the amended record.

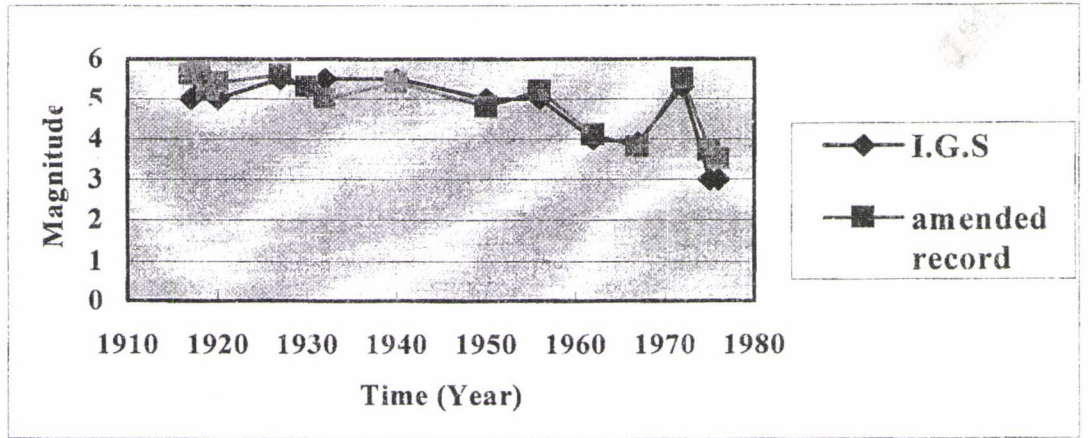


Fig. (6) Verification of I.G.S epicenters in the vicinity of Baghdad, (data from Khulafa Street Project, 1981).

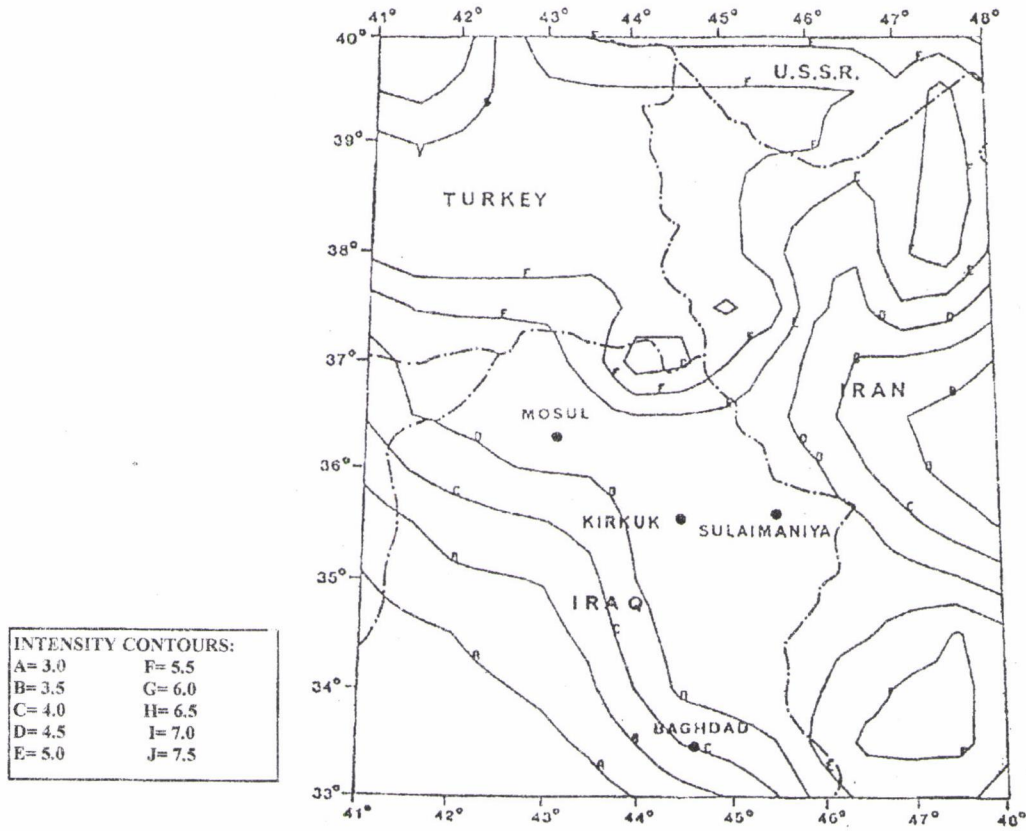


Fig. (7) Intensity contours: return period of 50 years (from Puttonen and Varpasuo, 1982).

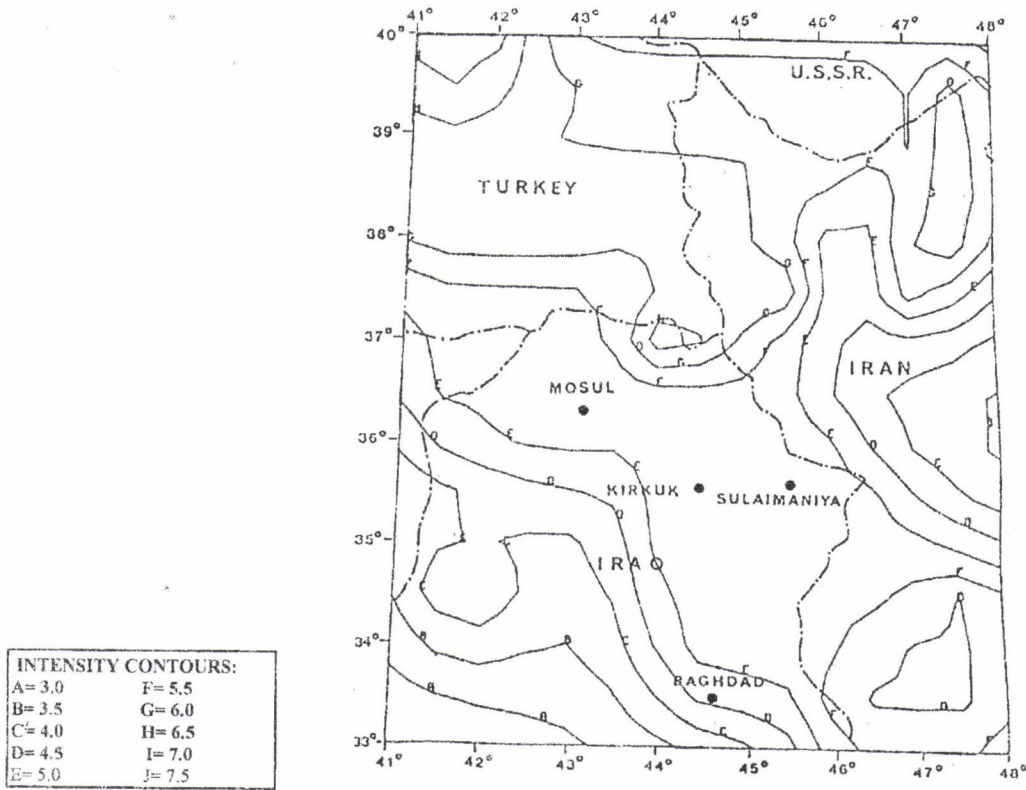


Fig. (8) Intensity contours: return period of 100 years (from Puttönen and Varpasuo, 1982).

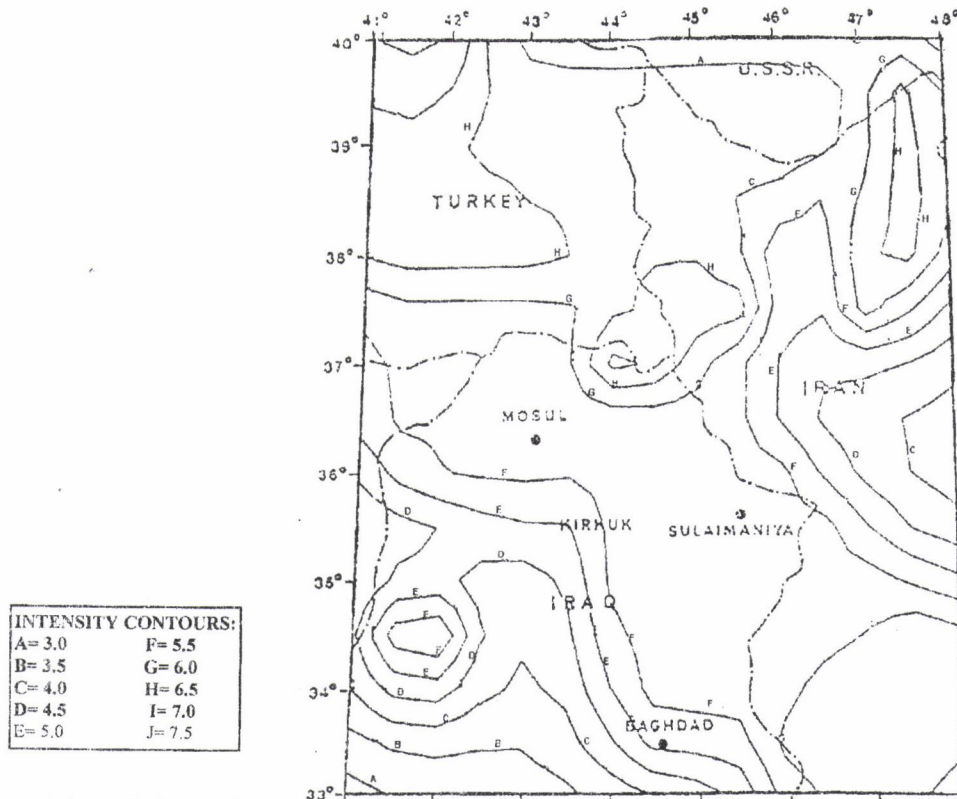


Fig. (9) Intensity contours: return period of 200 years (from Puttönen and Varpasuo, 1982).



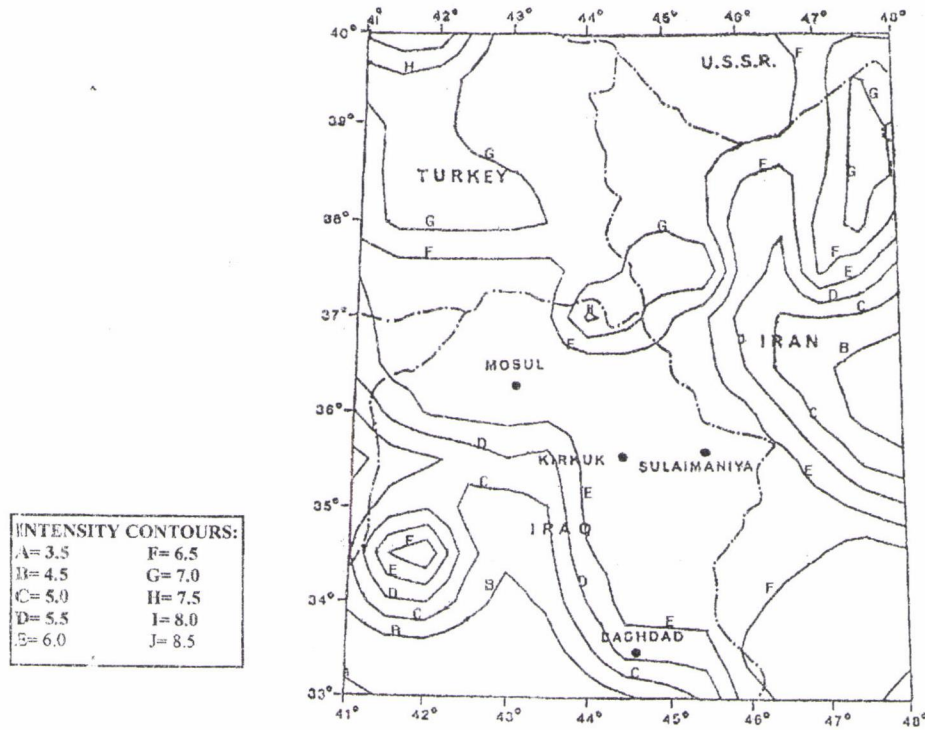


Fig. (10) Intensity contours: projected lifetime of 50 years with an exceeding probability of 10 percent (from Puttonen and Varpasuo, 1982) .

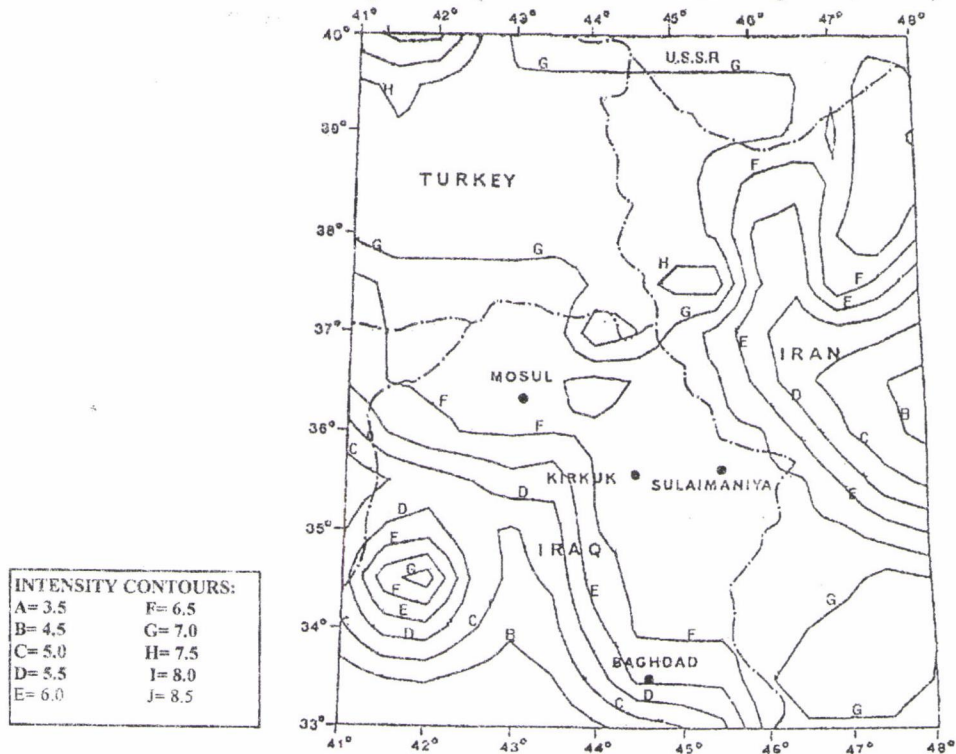


Fig. (11) Intensity contours: projected lifetime of 100 years with an exceeding probability of 10 percent (from Puttonen and Varpasuo, 1982) .

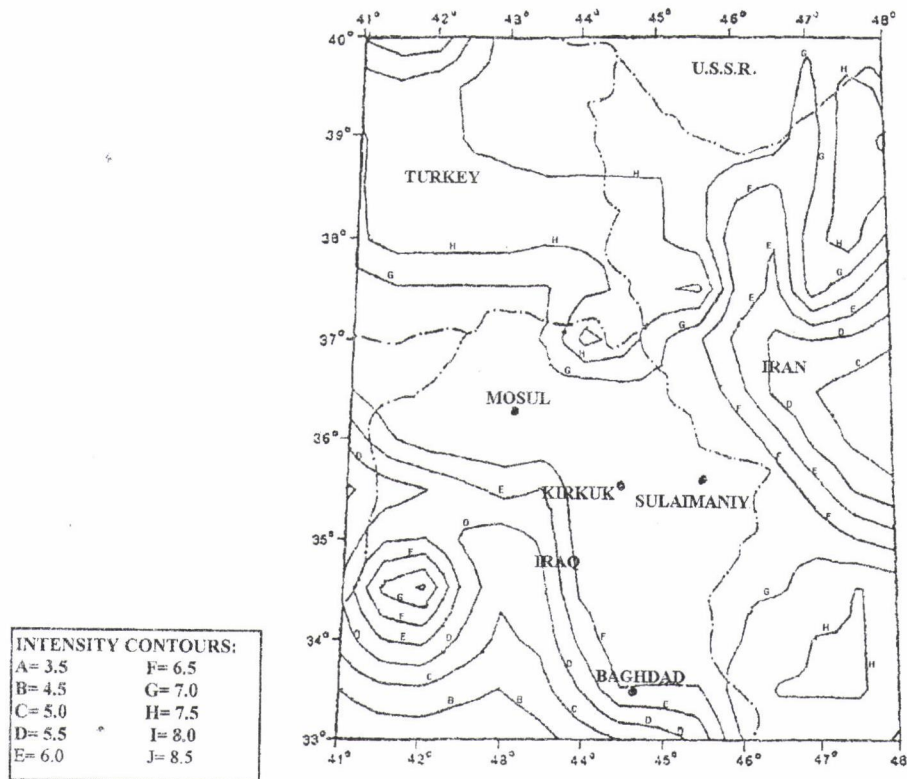


Fig. (12) Intensity contours: projected lifetime of 200 years with an exceeding probability of 10 percent (from Puttonen and Varpasuo, 1982).

From the previous studies, the intensity of earthquakes that Baghdad is subjected to can be summarized in **Table (2)**.

Table (2) Intensities of earthquakes in Baghdad region obtained from different studies.

Studies	Intensity (MM)
Intensity contours (return period)	≤ V
Intensity contours (futurism period)	<VII
Seismicity map of Iraq recoded by Iraqi Seismic Code Requirements for Buildings (1997)	VI- VII
MM= Modified Mercalli Scale	

## EVALUATION OF SEISMIC ACTION

### General

The seismic analysis of structures shall take the dynamic properties of the structure into consideration either by dynamic analysis or by equivalent static analysis. A dynamic analysis is highly recommended for specific structures such as slender high-rise buildings and structures with irregularities of geometry or mass distribution or rigidity distribution.



Ordinary structures may be designed by the equivalent static method using conventional linear elastic analysis. Appropriate post-elastic performance shall be provided by adequate choice of structural system and ductile detailing (Seed et al, 1975).

### Evaluation of Seismic Design Forces for Equivalent Static Analysis

#### Iraqi Seismic Code Requirements for Buildings - 1997

The total horizontal seismic design force acting on buildings and structures shall be determined according to the following formula, but shall not be less than  $(0.02 W)$  (Iraqi Seismic Code, 1997).

$$V = Z I S K W \quad (1)$$

where:

V= total unfactored horizontal seismic design force (seismic base shear),

Z= seismic hazard zoning coefficient,

I= importance factor related to the use of structure,

S= dynamic coefficient related to soil category,

K= structural system coefficient, specified for various types of structures, and

W= total weight of the structure including permanent and probable live load.

For Baghdad, Z is equal to 0.05 (according to **Fig. (13)** see **Fig. (13)**).

For the buildings and structures, where vertical seismic force effect can be critical (namely cantilevers, prestressed members, or horizontal members with clear spans greater than 20 m), separate control to the vertical seismic influence shall be performed considering the relevant vertical seismic design force determined by the formula:

$$R = 0.7 Z I S K W_p \quad (2)$$

where:

R= total vertical seismic design force,

Z= seismic hazard zoning coefficient,

I= importance factor,

S= dynamic coefficient related to soil category,

K= structural system coefficient, and

W= weight of parts under consideration.

For this case, Z is also equal to 0.05 for Baghdad region see **Fig. (13)**.

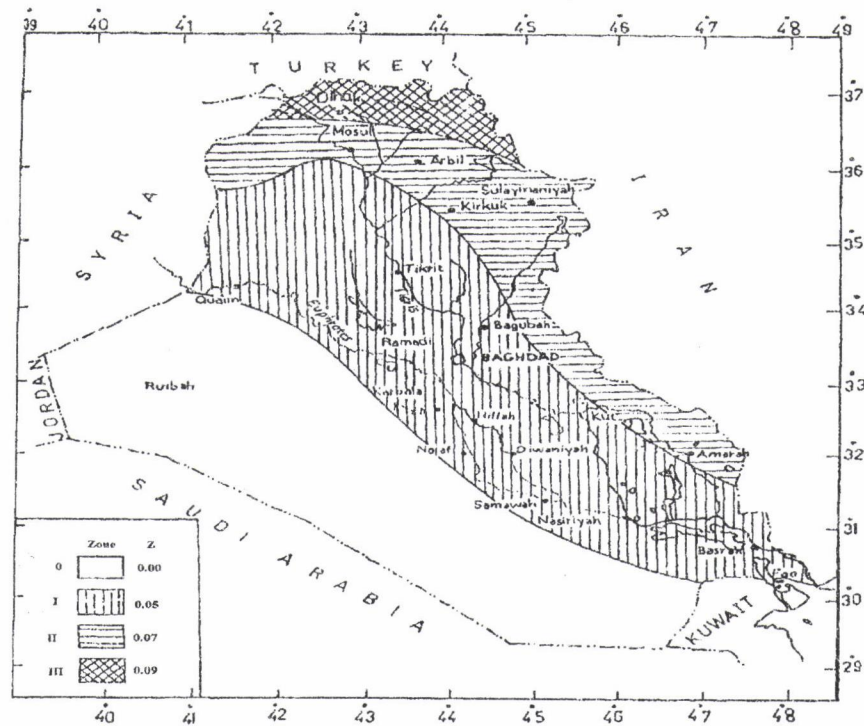


Fig. (13) Seismic zoning map of Iraq  
(from Iraqi Seismic Code Requirements for Buildings, 1997).

**International Building Code (IBC, 2000)**

The seismic base shear,  $V$ , in a given direction shall be determined in a coordinate with the following equation (IBC, 2000):

$$V = C_s W \quad (3)$$

where:

$C_s$  = the seismic response coefficient, and

$W$  = the effective seismic weight of the structure, including the total dead load and other loads.

The seismic response coefficient,  $C_s$ , shall be determined in accordance with the following equation:

$$C_s = S_{Ds} / [ R / I_E ] \quad (4)$$

where:

$I_E$  = the occupancy importance factor related to the use of structure, function (seismic group, natural of occupancy), see **Table (1604.5)** in IBC, 2000),

$R$  = the response modification factor, specified for various types of structures, function (type of building), (see **Table (1617.6)** in IBC, 2000), and

$S_{Ds}$  = the design spectral response acceleration at short period.

The value of the seismic response coefficient,  $C_s$ , computed in accordance with equation (4) need not exceed the following:

$$C_s = S_{D1} / [ RT / I_E ] \quad (5)$$

but shall not be taken less than:

$$C_s = 0.044 S_{Ds} I_E \quad (6)$$

where:

$S_{D1}$  = the design spectral response acceleration at 1- second period, and

$T$  = the fundamental period of the building.

### Determination of Seismic Design Category

All structures shall be assigned to a seismic design category based on their seismic use group and the design spectral response acceleration coefficients,  $S_{DS}$ . Each building and structure shall be assigned to the most severe seismic design category in accordance with **Table (3)**, irrespective of the fundamental period of vibration of the structure,  $T$ .

For Baghdad region,  $S_{DS} < 0.167g$ , therefore structures should be assigned to seismic design category A (**Table (1617.6)**, IBC, 2000). The seismic design requirements for seismic design category A state that structures need only comply with requirements of minimum lateral force given in section 1616.4.1 (IBC, 2000).

Table (3) Seismic design categories based on short period response accelerations, (from IBC, 2000).

Value of $S_{DS}$	Seismic use group		
	I	II	III
$S_{DS} < 0.167g$	A	A	A
$0.167g \leq S_{DS} < 0.33g$	B	B	C
$0.33g \leq S_{DS} < 0.50g$	C	C	D
$0.50g \leq S_{DS}$	D	D	D

### Seismic Use Groups And Occupancy Importance Factors

Each structure shall be assigned a seismic use group and a corresponding occupancy importance factor ( $I_E$ ).

Seismic use group I: Structures are those not assigned to either seismic use group II or III.

Seismic use group II: Structures are those, the failure of which would result in a substantial public hazard due to occupancy or use as indicated by **Table (1604.5)** (IBC, 2000).

Seismic use group III: Structures are those, the failure of which would result in having essential facilities that are required for postearthquake recovery and those containing substantial quantities of hazardous substances in **Table (1604.5)** (IBC, 2000).

Where operational access to a seismic use group III structure is required through an adjacent structure, the adjacent structure shall conform to the requirements for seismic use group III structures. Where operational access is less than 10 feet (3048 mm) from an interior lot line or less than 10 feet (3048 mm) from another structure, access protection from potential falling debris shall be provided by the owner of the seismic use group III structure.

### CONCLUSIONS

- 1- The studies of the intensity contours for return period have revealed that intensity greater than V on Mercalli Scale have never been recorded on the site at Baghdad. While Seismicity Map of Iraq by Iraqi Seismic Code and the intensity contours for futurism reveal that, Baghdad places in a zone of intensity (VI-VII) on the Modified Mercalli Scale.
- 2- Magnitude greater than 5.7 on Richter Scale had never been recorded on the site at Baghdad.
- 3- When calculating the total horizontal seismic design force acting on buildings and structures according to the formula of the Iraqi Seismic Code Requirements for Buildings (1997), the coefficient  $Z$  (seismic hazard zoning coefficient) shall be taken as (0.05) for Baghdad region. Structures in Baghdad region shall be designed according to category A in the (IBC, 2000) which requires a minimum design seismic lateral force as that defined in section 1616.4.1 (IBC, 2000).

**REFERENCES**

- Al-Omari, F. S., Jasim, J. A., and Aotdh, S. M., (1982), Historical and Natural Geology, Ministry of Higher Education and Scientific Research.
- Al-Sinawi, S. A., and Chalib, H., (1975), Historical Seismicity of Iraq, Bull Seismic Society of American, Vol.65, pp.541-547.
- Ambraseys, N. N., (1978), A Reappraisal of the Seismicity of the Middle East, Quarterly, Engineering Geology, Vol.11, pp.19-32.
- Dick, I. D., (1974), Extreme value Theory and Earthquakes, Proceeding of the Third World Conference on Earthquake Engineering, Vol.III, New Zealand, pp.45-55, 1965, as cited by Perry.
- Earthquakes Monitoring Center- Iraq Scientific Research Council.
- Fahmi, K. J., (1984), Preliminary Estimation of Earthquake Risk in Iraq, San Francisco.
- Gumbel, E. J., (1974), Extreme Value Statistics, Columbia University Press, New York, 1958, as cited by Perry.
- I.G.S, (1981), Earthquake Data of Geological Sciences, Global Seismology Unit, Edinburgh.
- IBC, International Building Code,( 2000),.
- Iraqi Seismic Code Requirements for Buildings, Building Research Centre, Gernal Commission for Industrial Research and Development Ministry of Industry and Minerals, Approved by Central Organization for Standardization and Quality Control, (1997),.
- Khulafa Street Project, Baghdad, earthquake Resistant Design Recommendations, May (1981),.
- Milne, W. G., and Davenport,A. G., "Statistical Parameters Applied to Seismic Regionalizations", Proceedings of the Third World Conference on Earthquake Engineering, Vol.III, New Zealand, pp.181-194, 1965, as cited by Perry, (1974),.
- Nordquist, J. M. (1974), Theory of Largest Values Applied to Earthquake Magnitude, Transactions of the American Geophysical Union, Vol.26, pp.29-31, 1945, as cited by Perry.
- Perry, R. M., and Rutledge, J. E., (1974), Earthquakes Effects on Structures, December.
- Puttonen, J. and Varpasuo, P., (1982), Seismic Risk analysis for Northern Iraq, Journal of Earthquake Engineering and Structural dynamic, Vol. 10, pp. 605-614,.
- Seed, H. B., Lee, K. L., Idriss, I. M., and Makdisi, F. I., (1975), The Slides in the San Fernando Dams During the Earthquake of February 9, 1971, Journal of the Geotechnical Engineering Division, Vol.101, No., GT7, July,.